



**GLOBAL
INDUCTION
LIGHTING US**



Global Induction Lighting US
917 SE 14th St, Fort Lauderdale, FL 33316
info@gilus.us • 954-467-8478 • www.gilus.us

EXTERIOR LIGHTING

Large Pole Top Fitter



GLPT1Q-100/120/150/200

POLE TOP FITTER

Features

- ◆ Sand Cast Aluminum Hinged Housing, Stamped Steel Plate, Set Screws.
- ◆ Classic Post Top Design.
- ◆ Uses Two-Piece 9" LexaLite Acrylic Refractor Globes. Includes Clear Prismatic Top and Bottom Refractors and Stainless Steel Clamp Band. 9" Neck. 23.16" High x 15.9" Diameter.
- ◆ Available With Type III or V Pattern Reflector.
- ◆ Smooth Black Finish Over a Chromate Conversion Coating.
- ◆ Accepts 3" Diameter Pole.
- ◆ Custom Colors Available Upon Request.
- ◆ CSA listed for wet locations.


Lamp and Ballast

- ◆ Globals 100/120/150/200 watt rectangular induction lamps feature high lighting efficiency, CRI 80+.
- ◆ Note: Total energy consumption=fixture wattage+5% for ballast overhead.
- ◆ Estimated lifespan 100,000 hours.
- ◆ Electronic ballast features high power factor (>0.95), flicker free, instant on/instant re-strike.


Applications



DIMENSIONS

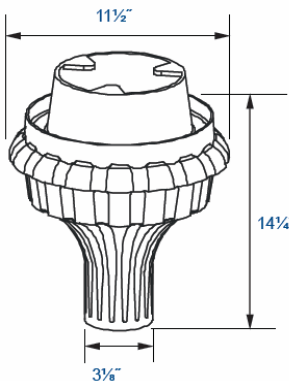

150WATTS <PHOTOMETRICS> 150WATTS

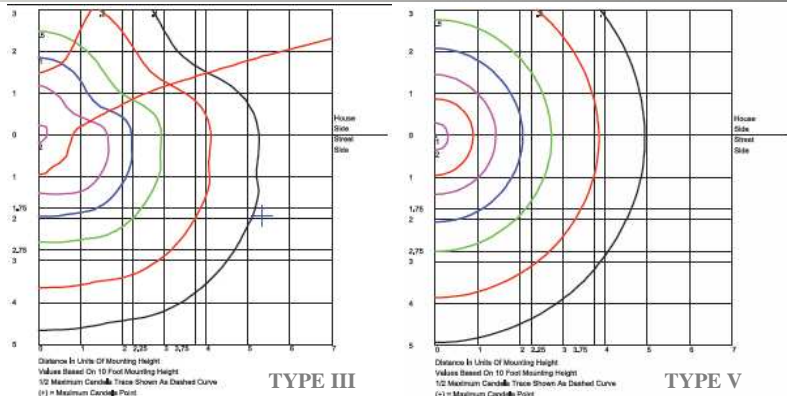

GLPT1Q 100/120/150/200



FIXTURE SPECIFICATIONS

Global Code	Type	Lamp	Voltage	Colour Temperature	Note:
GLPT1Q 100/120/150/200	Pole Top Fitter	100-200 Watts	120/240V 277V	5000K	Available in Type III or Type V Pattern.

"LIGHTING TODAY FOR A BRIGHTER TOMORROW"