



GLOBAL
INDUCTION
LIGHTING US



Global Induction Lighting US

917 SE 14th St, Fort Lauderdale, FL 33316

info@gilus.us • 954-467-8478 • www.gilus.us

EXTERIOR LIGHTING

Architectural/Coach Lighting



GLZT17 40/55/80

POST TOP LIGHTING


Features:

- ♦ Die cast aluminum ballast casing with powder coated finish for corrosion-resistance.
- ♦ Acrylic lens with good transparency, glare free .
- ♦ High quality heat resistant with gas -tight silicone rubber sealing.
- ♦ Available with optional photo cell.


Lamp and Ballast:

- ♦ Globals 40/55/80W round induction lamps feature high lighting efficiency.
- ♦ Note: Total energy consumption=fixture wattage+5% for ballast overhead.
- ♦ Estimated lifespan 100,000 hours
- ♦ Electronic ballast features high power factor (>0.95), flicker free, instant on/instant re-strike.
- ♦ Engineered to operate efficiently at +130F to -40 F.
- ♦ Applications: Parks, shopping malls, outlets, plazas, city halls, historic areas, gardens etc.

DIMENSIONS

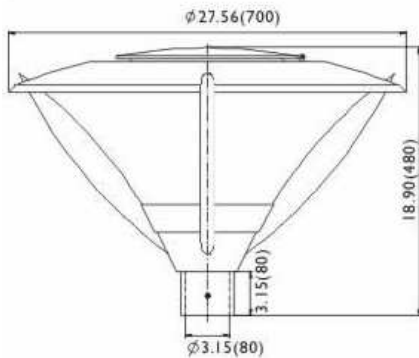

PHOTOMETRICS

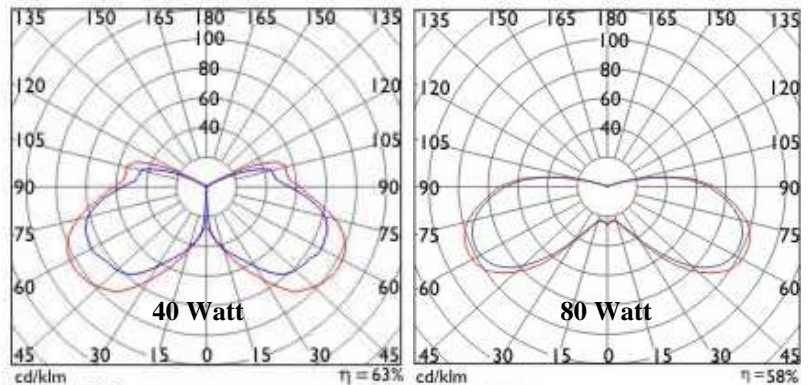

GLZT17 40 / 55 / 80

FIXTURE SPECIFICATIONS

| Global Code | Type | Lamp | Voltage | Colour Temperature | Notes: |
|--------------------|---------------------|--------------------------|---------|---|--------|
| GLZT17 40/55/80 | Architectural/Coach | 40/55/80/ Watts Round | 120~277 | 5,000K Color temperatures of 4100K or 6,500K available by special order | |

"LIGHTING TODAY FOR A BRIGHTER TOMORROW"