



GLOBAL
INDUCTION
LIGHTING US



Global Induction Lighting US
917 SE 14th St, Fort Lauderdale, FL 33316
info@gilus.us • 954-467-8478 • www.gilus.us

Low Profile/Interior Highbay Lighting

INTERIOR LIGHTING



Project: _____

Part No: _____

Quantity: _____

IP RATING
20



GL27IN-400

Features

- ◆ Die cast aluminum ballast casing with white powder coated finish for corrosion-resistance.
- ◆ High quality aluminum plate reflector with vacuum coated surface.
- ◆ Open structure for good ventilation and prolonged lifespan.
- ◆ Mounting by adjustable brackets (included), chains or pole.
- ◆ Includes 5 feet of cabtyre (cord) with strain relief clamp.
- ◆ **Note: no lens cover**

Lamp and Ballast


- ◆ Globals 400W rectangular tubular induction lamp features high lighting efficiency, stable output, etc.
- ◆ Note: Total energy consumption=fixture wattage+5% for ballast overhead.
- ◆ Estimated lifespan 100,000 hours.
- ◆ Electronic ballast features high power factor (>0.95), flicker free, instant on/instant re-strike.
- ◆ Ambient temperature for lighting fixture:-40C~+40C.

Applications


- ◆ Stadiums, workshops, warehouses, airports, airports, stations, exhibition halls, supermarkets.

INTERIOR HIGHBAY

DIMENSIONS

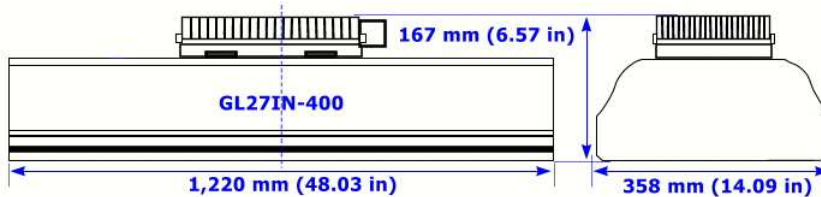

PHOTOMETRICS

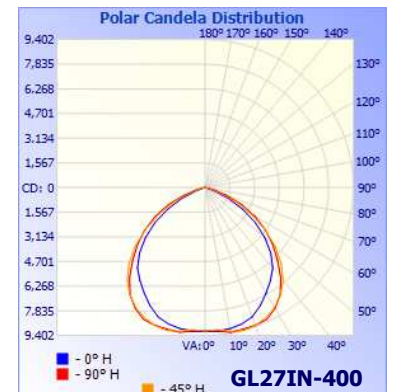

GL27IN-400

FIXTURE SPECIFICATIONS

Global Code	Type	Lamp	Voltage	Colour Temp.#	Notes:
GL27IN-400	Indoor Highbay	400W - Rectangular	120~277 208~347	6,500K	#Colour temperatures of 4100K or 5000K available by special order