



**GLOBAL  
INDUCTION  
LIGHTING US**



**Global Induction Lighting US**

917 SE 14th St, Fort Lauderdale, FL 33316

info@gilus.us • 954-467-8478 • www.gilus.us

INTERIOR LIGHTING

## Large 300/400 Watt Highbay



IP RATING  
**43**



### GLHB-300/400

#### Features

- ♦ Die cast aluminum ballast casing with white powder coated finish for corrosion-resistance.
- ♦ High purity aluminum reflector with vacuum coated inner surface.
- ♦ Acrylic lens and clamp-band.
- ♦ Includes 5 feet of cabtyre (cord) with strain relief clamp.

#### Lamp and Ballast


- ♦ Globals 300/400W round tubular induction lamp features high lighting efficiency.
- ♦ Note: Total energy consumption=fixture wattage+5% for ballast overhead.
- ♦ Estimated lifespan 100,000 hours.
- ♦ Electronic ballast features high power factor (>0.95), flicker free, instant on/instant re-strike.
- ♦ Ambient temperature for lighting fixture:-40C~+40C.

#### Applications


- ♦ Stadiums, workshops, warehouses, airports, refrigerated warehouses, retail showrooms, amusement parks, exhibition halls, supermarkets, arenas and factories.

HIGHBAY

### DIMENSIONS

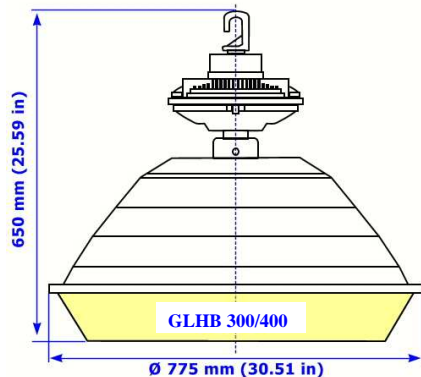

### PHOTOMETRICS

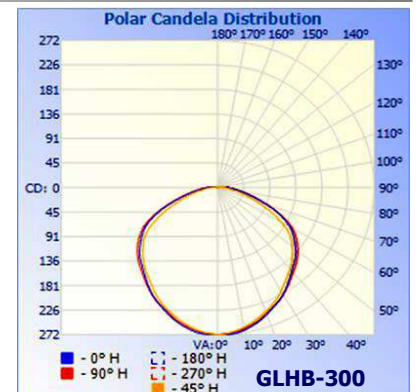

GLHB - 300/400

### FIXTURE SPECIFICATIONS

Global Code	Type	Lamp	Voltage	Colour Temp.#	Note
GLHB-300/400	Aluminum Highbay	300/400W Round	120~277	6,500K #Colour temperatures of 4100K or 5000K available by special order	Acrylic Lens