



**GLOBAL  
INDUCTION  
LIGHTING US**



**Global Induction Lighting US**

917 SE 14th St, Fort Lauderdale, FL 33316

info@gilus.us • 954-467-8478 • www.gilus.us

EXTERIOR LIGHTING

Shoebox/Flood Lighting



**GLSB-70/80/100/150**

SHOEBOX/FLOOD LIGHT

**Features**

- ◆ Die cast, aluminum housing with powder coated finish for corrosion-resistance.
- ◆ Clear tempered glass lens with gas tight seal.
- ◆ Anodized aluminum reflector designed to optimize light distribution.
- ◆ EPA Rating: 1.88ft<sup>2</sup>
- ◆ **Mounting options for most applications-yoke, knuckle, slip fitter and channel mounts.**


**Lamp and Ballast**

- ◆ Globals 70/80/100/150W rectangular induction lamp features high lighting efficiency, CRI 80+.
- ◆ Note: Total energy consumption=fixture wattage+5% for ballast overhead.
- ◆ Estimated lifespan 100,000 hours.
- ◆ Electronic ballast features high power factor (>0.95), flicker free, instant on/instant re-strike.
- ◆ Engineered to operate efficiently at +130F - Cold weather certified to -40 F.

**Applications**


- ◆ Parking lots, billboards, plazas, entrances, driveways, off-street areas, parks, tennis courts, etc.

**DIMENSIONS**

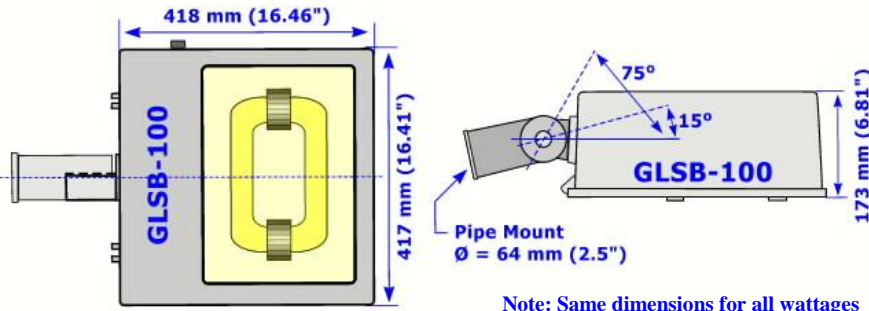

Note: Same dimensions for all wattages

**PHOTOMETRICS**

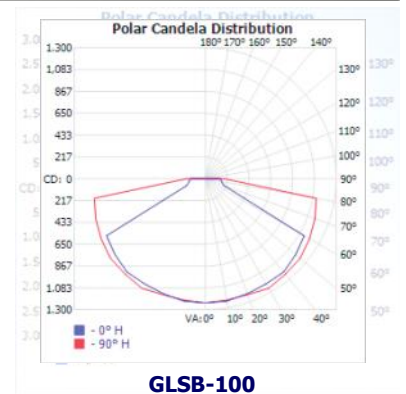

GLSB - 70 / 80 / 100 / 150

**FIXTURE SPECIFICATIONS**

Global Code	Type	Lamp	Voltage	Colour Temperature	Note
GLSB-70/80/100/150	Shoebox/Flood Light	70/80/100/150 - Rectangular	120~277 208~347	6,500K Colour temperatures of 4100K or 5000K available by special order	Tempered Glass Lens

**"LIGHTING TODAY FOR A BRIGHTER TOMORROW"**