



GLOBAL
INDUCTION
LIGHTING US



Global Induction Lighting US

917 SE 14th St, Fort Lauderdale, FL 33316

info@gilus.us • 954-467-8478 • www.gilus.us

EXTERIOR LIGHTING



Shoebox Lighting

Project: _____

Part No: _____

Quantity: _____

IP RATING
54



GLSB-200/250/300

Features

- ◆ Square, welded, aluminum housing with powder coated finish for corrosion-resistance.
- ◆ Clear tempered glass lens or UV stabilized and heat-resistant polycarbonate lens.
- ◆ High purity aluminum reflector with vacuum coated inner surface for optimal light distribution.
- ◆ **Mounting options for most applications-yoke, knuckle, slip fitter and channel mounts.**
- ◆ EPA: 200=3.25ft², 250/300=3.62ft²

Lamp and Ballast

- ◆ Globals 200W, 250W or 300W round tubular induction lamp features high lighting efficiency.
- ◆ Note: Total energy consumption=fixture wattage+5% for ballast overhead.
- ◆ Estimated lifespan 100,000 hours.
- ◆ Electronic ballast features high power factor (>0.95), flicker free, instant on/instant re-strike.
- ◆ Engineered to operate efficiently at +130F - Cold weather certified to -40 F.


Applications

- ◆ Parking lots, plazas, public entrances, driveways, off-street areas, parks, tennis courts, etc.


SHOEBOX LIGHT



DIMENSIONS

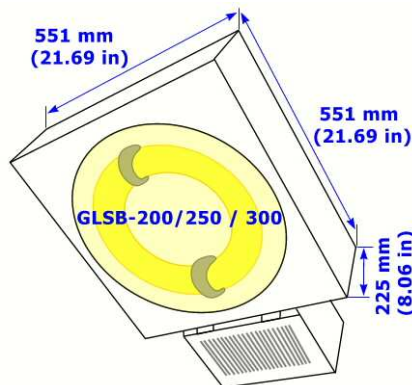

PHOTOMETRICS

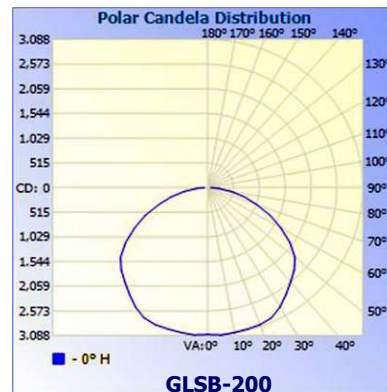

GLSB - 200 / 250 / 300



FIXTURE SPECIFICATIONS

| Global Code | Type | Lamp | Voltage | Colour Temp.# | Note |
|-------------|---------------|--------------|---------|---|-----------------------------|
| GLSB-200 | Shoebox Light | 200W - Round | 120~277 | 6,500K #Colour temperatures of 4100K or 5000K available by special order | Glass or Polycarbonate Lens |
| GLSB-250 | | 250W - Round | | | |
| GLSB-300 | | 300W - Round | | | |