



GLOBAL
INDUCTION
LIGHTING US



Global Induction Lighting US
917 SE 14th St, Fort Lauderdale, FL 33316
info@gilus.us • 954-467-8478 • www.gilus.us

EXTERIOR LIGHTING

Shoebox Lighting



IP RATING
65



GLSBN-200/250

Features

- ◆ High quality die cast aluminum housing with powder coated finish for corrosion-resistance.
- ◆ Clear tempered glass lens with gas tight seal.
- ◆ Anodized aluminum reflector designed to optimize light distribution.
- ◆ EPA Rating: 150/200=3.94ft², 250/300=3.64ft
- ◆ **Mounting options for most applications-yoke, knuckle, slip fitter and channel mounts.**

Lamp and Ballast


- ◆ Globals 200W/250W round tubular induction lamp features high lighting efficiency.
- ◆ Note: Total energy consumption=fixture wattage+5% for ballast overhead.
- ◆ Estimated lifespan 100,000 hours.
- ◆ Electronic ballast features high power factor (>0.95), flicker free, instant on/instant re-strike.
- ◆ Engineered to operate efficiently at +130F - Cold weather certified to -40 F.

Applications

- ◆ Parking lots, plazas, public entrances, driveways, off-street areas, parks, etc.


SHOEBBOX LIGHTING

DIMENSIONS

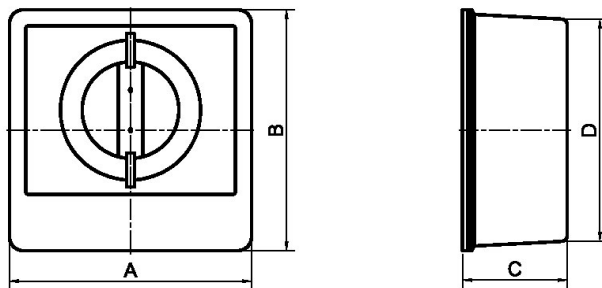

A-23.62" B-23.62" C-10.24" D21.73"

PHOTOMETRICS

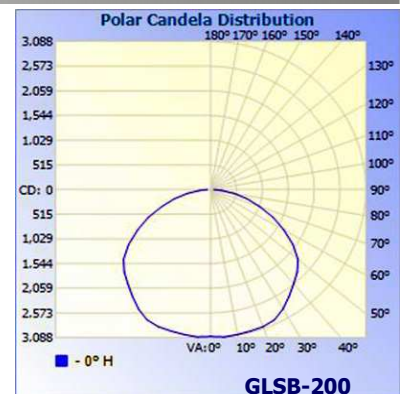

GLSB N-200/250

FIXTURE SPECIFICATIONS

Global Code	Type	Lamp	Voltage	Colour Temp.#	Note
GLSBN 200/250	Shoebox Light	200/250 Watt Round	120~277	6500K #Colour temperatures of 4100K or 5000K available by special order	Tempered Glass Lens

