



**GLOBAL
INDUCTION
LIGHTING US**



Global Induction Lighting US

917 SE 14th St, Fort Lauderdale, FL 33316

info@gilus.us • 954-467-8478 • www.gilus.us

EXTERIOR LIGHTING

Roadway Lighting



Project: _____

Part No: _____

Quantity: _____

IP RATING
54



GLZD4-40/55/80

ROADWAY LIGHT

Features

- ◆ High pressure, die cast aluminum housing with powder coated finish for corrosion-resistance.
- ◆ Heat resistant polycarbonate or tempered glass lens.
- ◆ High purity aluminum reflector with vacuum coated inner surface
- ◆ EPA: 1.5ft²

Lamp and Ballast


- ◆ Globals 40W, 55W or 80W round tubular induction lamp features high lighting efficiency.
- ◆ Note: Total energy consumption=fixture wattage+5% for ballast overhead.
- ◆ Estimated lifespan 100,000 hours.
- ◆ Electronic ballast features high power factor (>0.95), flicker free, instant on/instant re-strike.
- ◆ Engineered to operate efficiently at +130F - Cold weather certified to -40 F.

Applications


- ◆ Roadways, parking lots, plazas, public entrances, driveways, off-street areas, etc.



DIMENSIONS

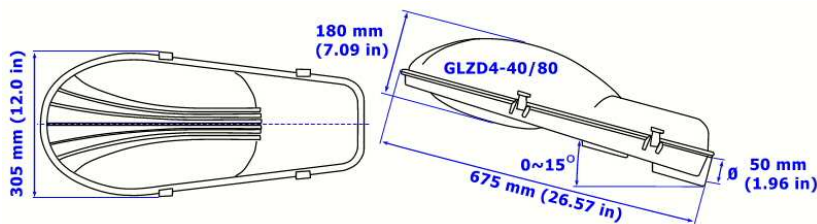

PHOTOMETRICS

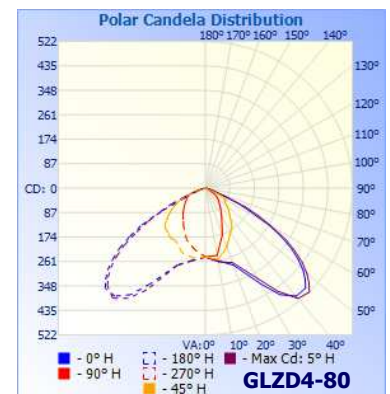

GLZD4 - 40 / 80



FIXTURE SPECIFICATIONS

Global Code	Type	Lamp	Voltage	Colour Temp.#	Notes:
GLZD4-40/55	Roadway Light	40/55W - Round	120~277	6,500K	No Photo sensor.
GLZD4-80		80W - Round			

#Colour temperatures of 4100K or 6500K available by special order